


80 x 80 x 25 mm

- Motor Design : Shaded Pole
- Housing : Aluminium Die-cast
- Impellor : PBT (Polybutylene Terephthalate)
- Bearing : Sleeve Bearing
- Operating Voltage : 230V (185 ~ 245 VAC)
- Dielectric Strength : AC 1000V for 5 Second
- Insulation : Class B
- Insulation Resistance : Above 100M Ohms at 500 VDC
- Connection : W = Lead Wire
- Motor Protection : Impedance Protected
- Operating Temperature : - 10 to +70°C
- Net Weight : 215 Grams



Specification

Model	Bearing	Voltage	Frequency	Current	Input Power	Speed	Air Flow	Static Pressure	Noise
REC		V	Hz	A	W	RPM	CFM	mm H ₂ O	dB(A)
28025 A2 M W	Sleeve	230	50/60	0.075/0.065	15/13	2500/2900	22/25	3.2/4.5	29/30

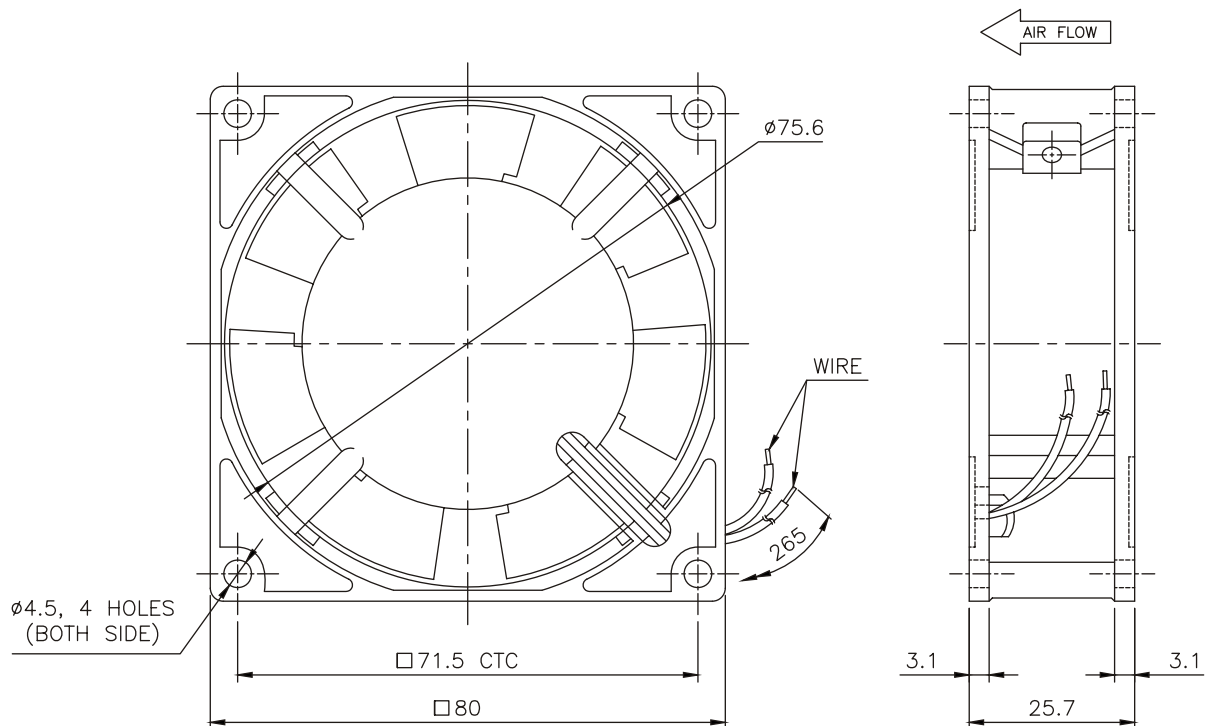

* Specifications Subject to Change Without Notice